



Since 1959


Product Information Sheet

9007 12V 100/80W

9007/100/80W

2012. 07. 31 NEW

2010. 12. 20 OLD

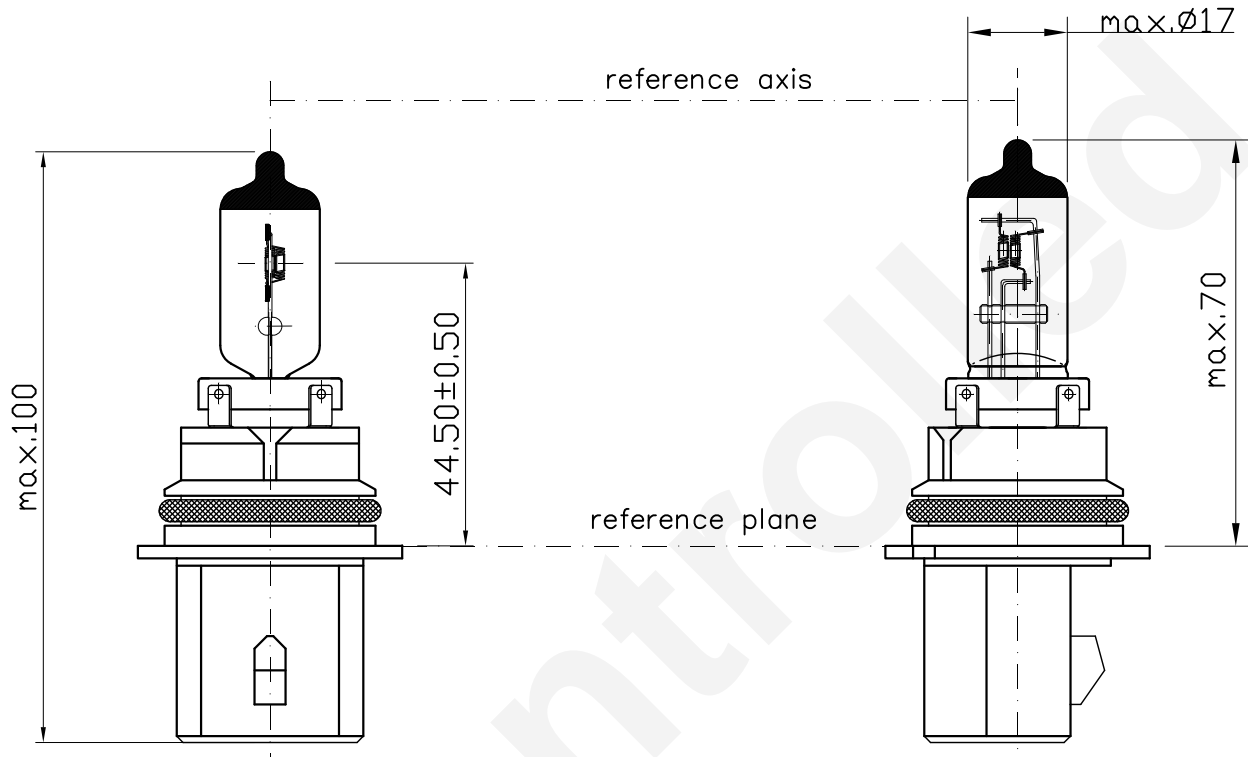

Halogen bulb
 9007 RA 12V 100/80W
 Cap: ¹⁾ PX29t
 Type: Rally
 ECE R37 None
 FMVSS 108 None
 Bulb mat.: UV-Cut Hardglass
 Made in korea / INCHEON

1) according to IEC 61-1 sheet 7004-39, SAE J1383 and FMVSS 108

| | | |
|--------------------------------|-----|---------------------------------------|
| Technical data | | |
| Test voltage | | 12.8V |
| Power | DBF | 100W max |
| | PBF | 80W max |
| Luminous flux | DBF | 1800lm ±15% |
| | PBF | 1500lm ±15% |
| Lumen maintenance | | |
| | DBF | 90 % min |
| | PBF | 90 % min |
| Rated life: | | at 14.0V |
| | DBF | 100 h average |
| | PBF | 200 h average |
| Maximum operating temperature: | | 1:bulb 650°C max 2:pinch 400°C max |
| Operating position | | Vertical |