



PART NO.	NO. OF TERMINALS	TYPE	STYLE	VOLT CAPACITY
EF32RLNP	2	LED	Round	11–15V

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
1	ISSUED	2016/2/14	D.C.
2	ADDED CEC LOGO	05/04/2018	R.M.

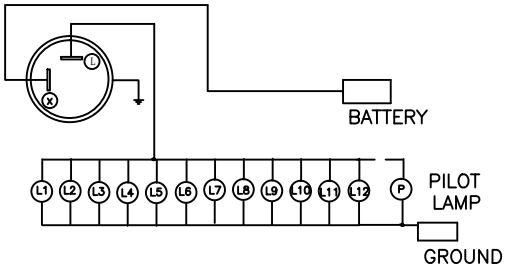

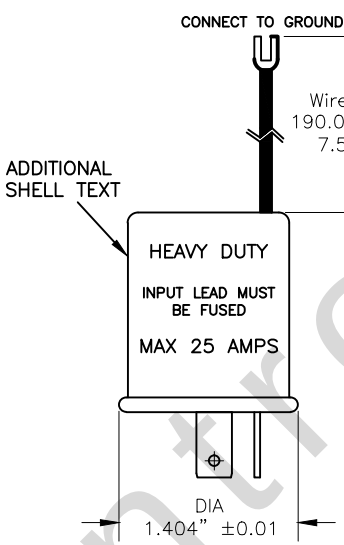

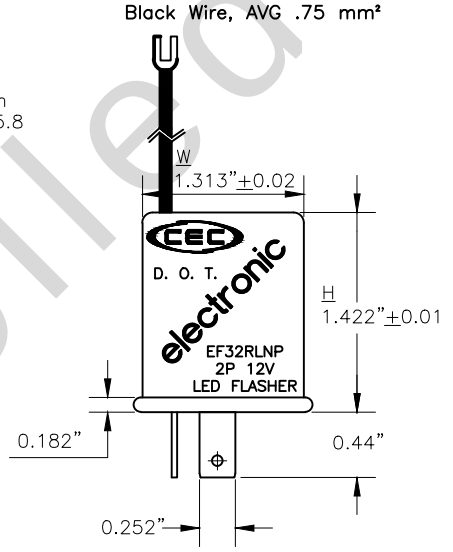

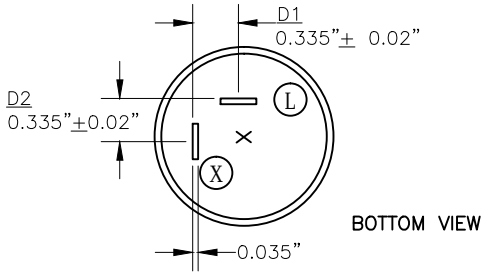

Specifications: FMVSS 108 SAE J590b, J945&J1690 Class A

Shell Construction: Plastic
Rated Load: 0.1 Amp to 25 Amp self-adjusting to lamp amperage draw.
Lamp Ratings: 0.1 Amp to 25 Amps
Temperature Operating Range: -25°F to 140° F
Rated Voltage: 11 to 15 Volts DC.

Voltage Drop at Rated Current: 500 mv
Time to First Flash: Less than 1.5 seconds.
Flash Rate over Temperature Range: 60 to 120 Flash Per Minute
Duty Cycle: 30% to 75%
Electrical Source: Special Note: External Wire Provides Ground
25 amps. Input Lead must be fused.
L Terminal = Load (Lamp Output)
X Terminal = Battery (Power Input)

Non-Polarity

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES
TOLERANCES
DECIMALS .XX ± .05 .XXX ± .010
ANGULAR ± 0.5°
FRACTIONAL ±1/64

DRAWN	DATE
D. C,	2016/2/24
CHECKED	
DESIGN	
MATERIAL	

CEC INDUSTRIES LTD
599 BOND STREET LINCOLNSHIRE IL 60069

TITLE
ELECTRONIC FLASHER EF32RLNP

SIZE	FSCM NO.	DWG NO.	REV
A		EF32RLNP	2

SCALE | PLOT SCALE | SHEET 1 OF 1

FILE EF32RLNP.dwg

DO NOT SCALE DRAWING

uncontrolled